

COLLABORATION FURNITURE

PRECONFIGURED SOLUTIONS



SINGLE BAY DEEP PROFILE CABINET

D3/317B/


This robust, large-capacity cabinet system houses all electronics, including integrated support for AV and IT systems. Freestanding and fully-integrated, this credenza is perfect for retrofit installations, allowing for quick and efficient installation without involving additional tradespeople to install electrical wiring or reinforce walls.









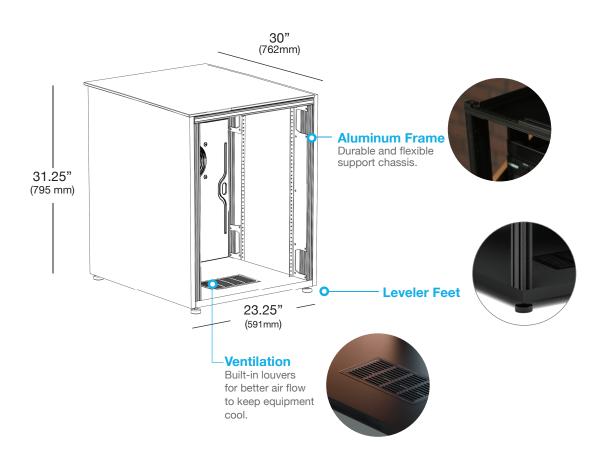


*CREDENZA INCLUDES:

- 1. (4) 15-U Rack Rails
- 2.(1) Active Cooling Rear Panel
- 3. (2) Lacing Bars

Typical interior bay dimensions:

19.75"W (502 mm) x 27.75"H (705 mm) x 28.5"D (724mm)




D3/317B/

15-U RACK RAILS

- · Frame-Mounted, 15-U Rack Rails are affixed to cabinet's aluminum frame
- · Rails are compatible with all industry standard 19" components and accessories
- · Wire manager, lacing bars included (2)
- · Hole pattern is a standard 19 EIA rack mount pattern allowing for mounting of equipment with attachment holes either wide or universally spaced.
- · Threaded for 10-32 screws
- · Black powder coated steel



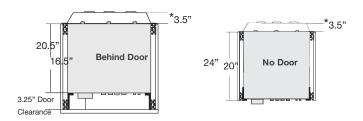



ADD ON ACCESSORIES



Vented Shelves

RM/VS2U	Vented Shelf, 2U - 14"D
RM/VS3U	Vented Shelf, 3U - 14"D
RM/VS4U	Vented Shelf, 4U - 14"D


- Mounts to Pull-Out Rack Cartridge and any 19" standard rack
- 19" EIA standard rack mount, 14" deep, vented shelf
- Black powder coated steel.



Wire Lacing Bars for Cartridge

RM/LB2	Pull-Out Rack Cartridge Lacing Bar, Set of 2
--------	--

- Mounts to Rack Cartridge and any 19"standard rack
- Infinitely adjustable wire management
- Includes one velcro wrap strap
- Black powder coated steel



Face Plates

RM/VFP1U	Vented Face Plate, 1U
RM/VFP2U	Vented Face Plate, 2U
RM/VFP3U	Vented Face Plate, 3U
RM/VFP4U	Vented Face Plate, 4U

- Mounts to Pull-Out Rack Cartridge and any 19" standard rack
- Black powder coated steel
- Perforated 16ga steel for component air flow (allows 62% free air flow)

D3/317B/

COOLING & ACCESS

Active Cooling Rear Panel

- Thermostatically controlled cooling system turns On at approx 80° F, maximum speed is reached at 95° F
- · Automatic, low-noise cooling system with 22 dBA, quad 80 mm exhaust fans
- · Air Flow: 26 CFM
- · Exhaust Direction: Rearward
- Power Consumption: 1W in standy mode; 4 W in mid speed 8-10 W in full speed
- · Thermistor: Remote with 20" lead
- Input: 100-240V / 50Hz-60Hz. International power plug available (#400-230 and 400-235)





D3/317B/

STYLES

We select the finest materials and finishes. Choose from sleek, hand-polished, high-gloss finishes to richly textured real wood fronts or a contemporary beveled edge style with a mix of materials. If you are looking for something special please contact us to discuss custom options.



MILAN / WHITE White, 3-D Diamond Pattern Doors with 1/2" (12mm) White, Solid Surface D3/317B/ML/WH/WH



MILAN / BLACK White, 3-D Diamond Pattern Doors with 1/2" (12mm) Black, Solid Surface D3/317B/ML/WH/BK



MIAMI / BLACK Gloss Warm White Door, Doors with 1/2" (12mm) Black, Solid Surface D3/317B/MM/GW



MIAMI / WHITE Gloss Warm White Door. Doors with 1/2" (12mm) White Solid Surface D3/317B/MM/GW/WH



DENVER - OAK Natural Oak, Bark-Textured Doors with 1/2" (12mm) Black, Solid Surface D3/317B/DV/NO



DENVER - WALNUT Medium Walnut, Bark-Textured Doors with 1/2" (12mm) Black, Solid Surface D3/317B/DV/MW



CHICAGO Black Oak, Grass-Textured Doors with 1/2" (12mm) Black, Solid Surface D3/317B/CH/BO



OSLO Black Oak Sides, Black Glass Doors with 1/2" (12mm) Black, Solid Surface D3/317B/OS/BG



ZURICH Linear Texture - Opium Brown Doors with 1/2" (12mm) Black, Solid Surface D3/317B/ZU/OB



BERLIN Wenge, Wave-Texture Doors with 1/2" (12mm) Black, Solid Surface D3/317B/BL/WE

