


# LARGE SINGLE DISPLAY MOUNT (FOR 1, 2 & 3 BAY CABINETS)

#### **Vesa Patterns**

Horizontal: 200, 250, 300, 350, 400, 450, 500, 550, 600

Vertical: 200, 300, 350, 400

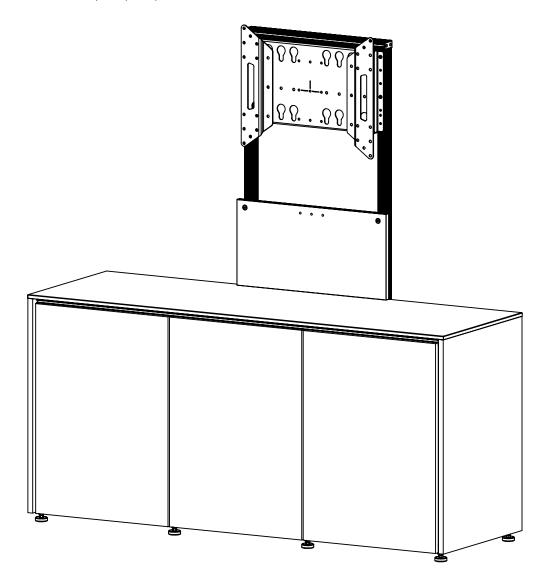


#### LARGE SINGLE DISPLAY MOUNT HEIGHT/WEIGHT CAPACITY

		56" - Low	63" - H1	69" - H2	74" - H3	79" - H4	Wall Secured
Center of Vesa Range		47" - 53"	54" - 60"	59" - 65"	44" - 70"	69" - 75"	All
1 Bay	M1	100lbs	100lbs				300lbs
2 Bay	M1	125lbs	125lbs	125lbs			300lbs
3 Bay	M1	300lbs	300lbs	175lbs	175lbs		300lbs


## 1. Install Display Interface Brackets


Fasten the display interface brackets using fasteners (length and size recommended by the display manufacturer).

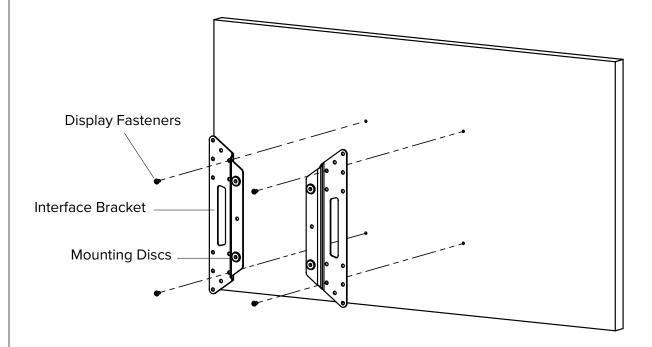

## 2a. Adjust Screen Center Height

Adjust Display mounting height by loosening the 4 screws located on the flange of the display header. The top screws will need to be loosened a little further than the bottom screws as they are longer for positioning the mount header level by protruding into the predrilled holes that can be seen in the vertical post.

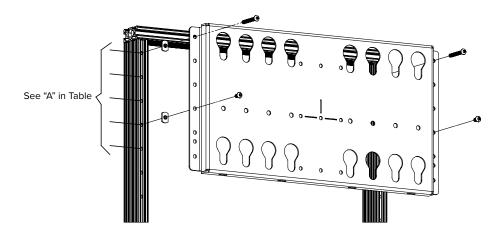

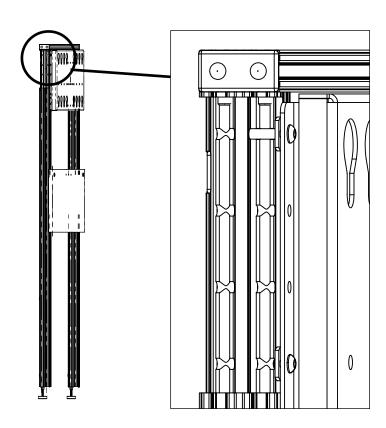


## 3. Attach Tech Shelf Or Speaker Bracket (Optional)

Refer to Tech Shelf or Speaker Bracket Accessory Instructions to install.

## 4. Mount Display On Keyhole Header

Carefully align display interface brackets onto the keyhole header. Be sure all mounting discs are fully engaged.

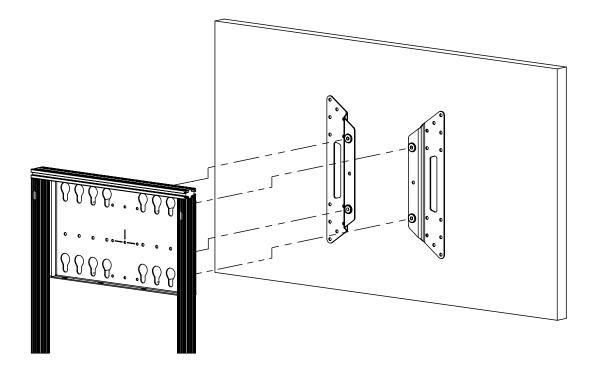



#### LIMITED WARRANTY FOR COMMERCIAL PRODUCTS

Salamander is proud to stand behind our products with industry-leading warranties. Should you ever encounter any problem with your Salamander product, let us know. We are here to make it right. 1.800.535.5659 - 860.761.9500

Full warranty including limitations and warranty claim information may be found at www.salamanderdesigns.com/commercial/warranty