




X-LARGE SINGLE DISPLAY MOUNT

FOR 4 BAY CABINETS

Vesa Patterns

Horizontal: 400, 500, 600, 700, 800, 900, 1000, 1100, 1200

Vertical: 100, 200, 300, 400, 500, 600

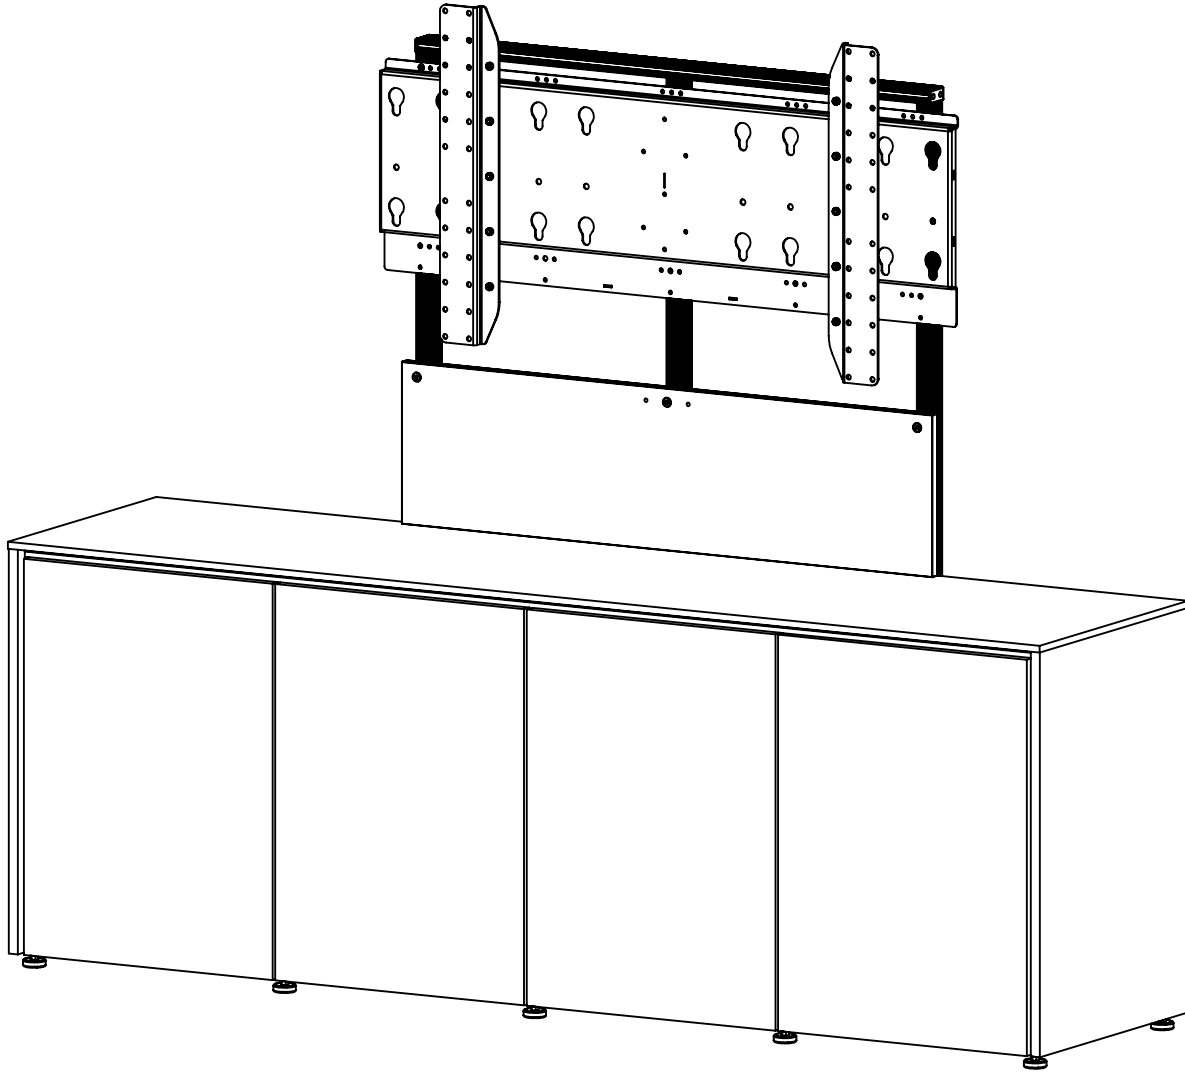


X-LARGE SINGLE DISPLAY MOUNT HEIGHT/WEIGHT CAPACITY

		56" - Low	63" - H1	69" - H2	74" - H3	79" - H4	Wall Secured
Center of Vesa Range (A)		45" - 51"	52" - 58"	57" - 63"	63" - 69"	68" - 74"	All
4-Bay	M1XL	400lbs	400lbs	250lbs	250lbs	250lbs	400lbs

1. Install Display Interface Brackets


Fasten the display interface brackets using fasteners (length and size recommended by the display manufacturer).

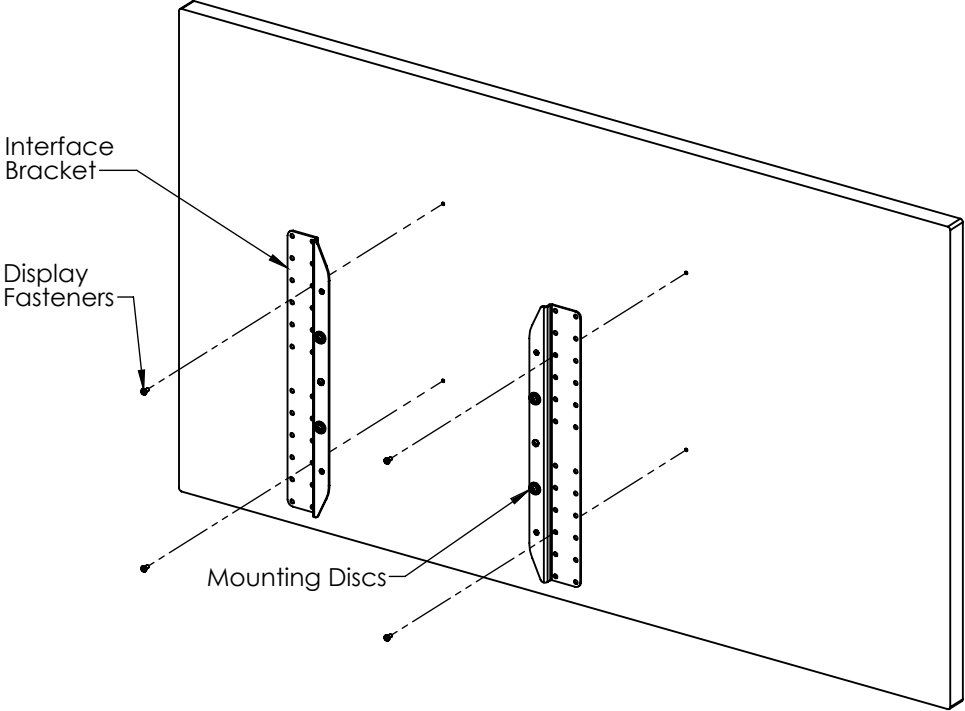

2a. Adjust Screen Center Height


If desired, adjust the screen center height by removing the three 1/4-20 x 2" Button Head Socket Cap Screws and loosening (Do Not Remove) the three 1/4-20 x 5/8" Button Head Socket Cap Screws and the 1/4-20 x 3/4" Set Screws.

Lower the Display Header to the desired position and reattach the 2" screws through the Display Header and Vertical Post to the Flat Nut.

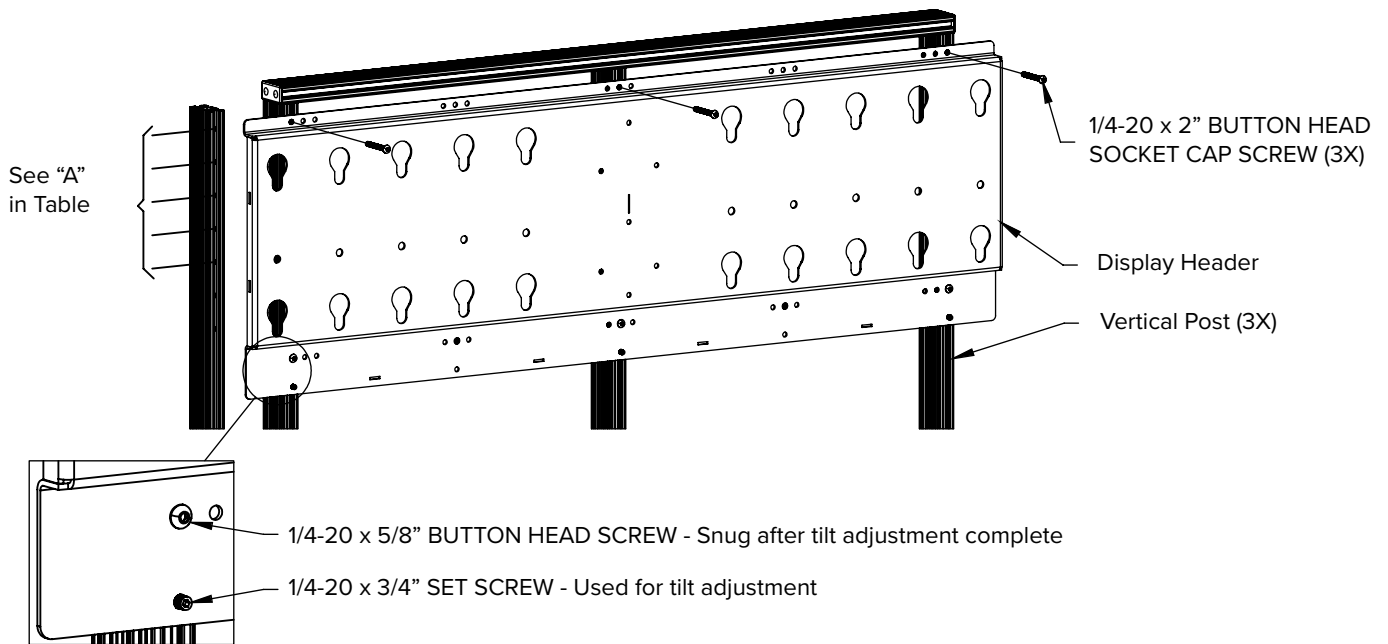

2b. Adjust Tilt Angle

To adjust tilt angle, if necessary, leave the 1/4-20 x 5/8" Button Head Screws loose and adjust the Set Screws. Snug the 1/4-20 x 5/8" Button Head Screws, but do not over tighten.

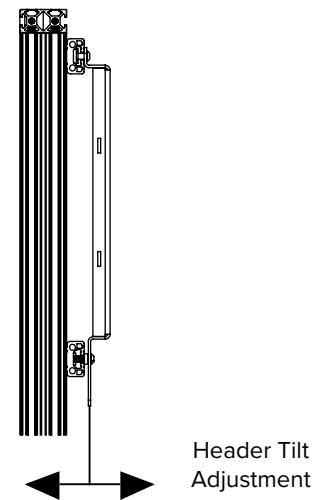


3. Attach Tech Shelf Or Speaker Bracket (Optional)

Refer to Tech Shelf or Speaker Bracket Accessory Instructions to install.

4. Mount Display On Keyhole Header

Carefully align display interface brackets onto the keyhole header.
Be sure all mounting discs are fully engaged.

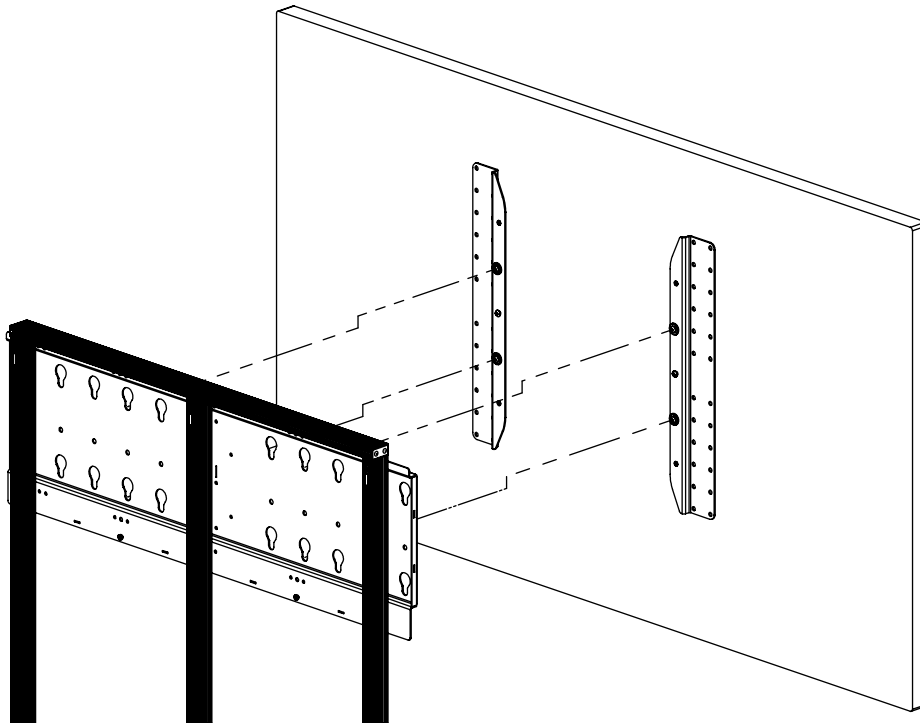

LIMITED WARRANTY FOR COMMERCIAL PRODUCTS

Salamander is proud to stand behind our products with industry-leading warranties. Should you ever encounter any problem with your Salamander product, let us know. We are here to make it right. 1.800.535.5659 - 860.761.9500

Full warranty including limitations and warranty claim information may be found at www.salamanderdesigns.com/commercial/warranty